



Degraded joints?
We have the definitive solution
in just



12 h

Smart Joint® Precasted joint

Smart Joint® is a precasted joint of composite material used in correspondence with old degraded joints. Suitable for a high intensity of heavy traffic flooring, industrial kind.

It is applied in total adherence to the existing support, becoming itself a floor part.


Advantages

- It guarantees floor flatness and continuity.
- It prevents wheels wear of used means for handling.
- It eliminates shocks, so it preserves the health of forklift drivers.
- Easy to apply, after only 12 hours, the surface can be used.
- It allows both flooring vertical and horizontal movements.
- Chemically resistant.
- It does not deteriorate over time and requires no maintenance.

Technical features

Module length: 1.000 mm.
Module width: 250 mm.
Module height: 25 mm.
Maximum gap existing joint: 29 mm.
Maximum horizontal movement: 15 mm.
Compression strength: 90 N/mm².
Flexural resistance: 75 N/mm².
Color: gray concrete.

Smart Joint® is Edil Noli srl exclusive patent no. 102015000042401 issued on 23.01.2018

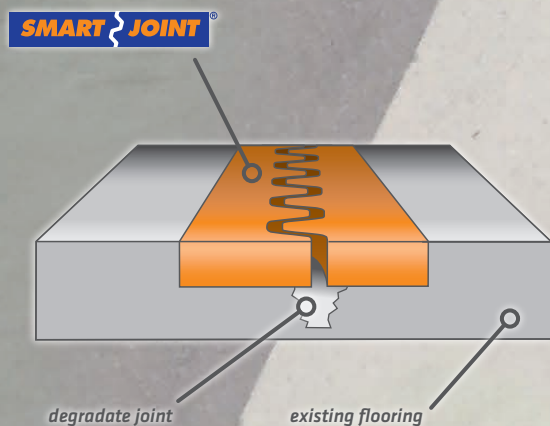

H 18:00
Work Starting

12 h



They chose us:



H 6:00
Restarting of forklifts traffic